Base-mounted glass balustrade

R01 · 2026-11-26 · EN

An aluminium shoe runs along the lower edge of the glass and houses an L-shaped glass carrier and a snap-on cover.

Installation detail

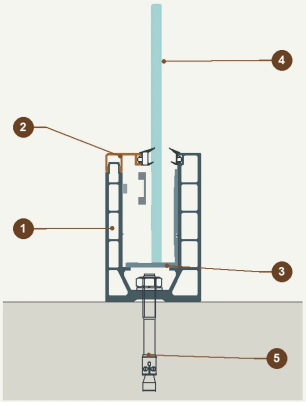

Base shoe anchored to the supporting slab · typical section

1. Base shoe · BR-01
2. Snap-on cover · BR-02
3. L-shaped glass carrier · BR-03
4. Glass panel
5. Base fixing and supporting slab

Base profiles

Overall section dimensions · width × height

BR-01	Base shoe	74 × 115 mm
BR-02	Snap-on cover	28 × 15.05 mm
BR-03	L-shaped glass carrier	40 × 76 mm

Optional profiles

RHB-GB-T20	Tile edge trim	20.27 × 30.5 mm
RHB-GB-U26	Top capping profile	25.92 × 24 mm

Select T20 to finish the tile edge or U26 to cap the top of the glass. Each profile is priced separately.

Project-specific design inputs

The section shows how the profiles meet the glass and slab. Glass build-up, panel height, anchor type and spacing depend on project loads, slab edge distance and concrete properties. Coordinate finishes, waterproofing and drainage in the project detail.

For design coordination and pricing. Fabrication and installation require an approved project-specific drawing.